

FEATURES

- 6.69 mm square active area
- Low dark current & capacitance
- Fast rise times
- High QE at 1064 nm

DESCRIPTION

4 X 10.96 mm² NIR enhanced Quadrant PIN Photodiode with 70 µm gaps. Packaged in an isolated case TO8 with a fused silica window cap.

APPLICATIONS


- Pulsed 1064 nm laser detection
- NIR pulsed light sensor
- High speed photometry




ABSOLUTE MAXIMUM RATING

SYMBOL	PARAMETER	MIN	MAX	UNITS
T _{STG}	Storage Temp	-20	+80	°C
T _{OP}	Operating Temp	0	+70	°C
V _{R(OP)}	Reverse Operating Voltage	-	180	V
I _(PEAK)	Peak DC Current	-	10	mA

SCHEMATIC

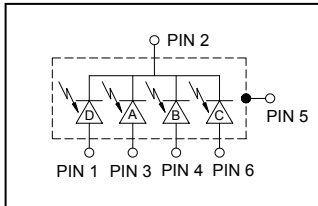

SPECTRAL RESPONSE @ 23°C

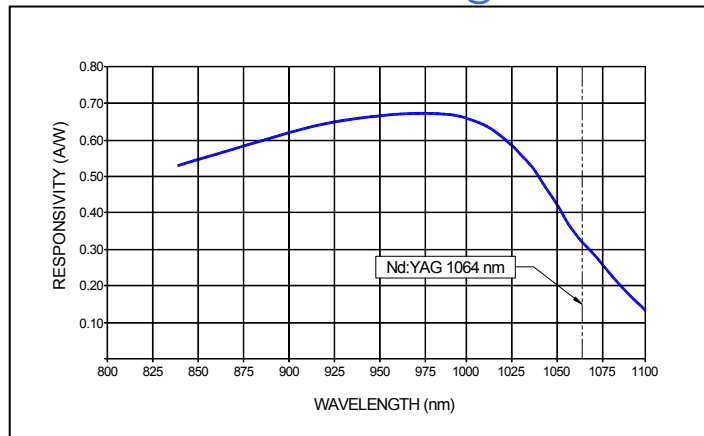

ELECTRO-OPTICAL CHARACTERISTICS @ 23 °C PER ELEMENT

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I _D	Dark Current	V _R = 150 V; @ 23°C	---	20	---	nA
		V _R = 150 V; @ 60°C	---	1000	---	
C	Capacitance	V _R = 150 V	---	15	---	pF
	Responsivity	V _R = 150 V; λ = 1064 nm; @ 23°C	---	0.30	---	A/W
		V _R = 150 V; λ = 1064 nm; @ 60°C	---	0.40	---	
V _{BR}	Breakdown Voltage	I _R = 10 µA	200	---	---	V
t _r	Rise Time	V _R = 150 V; λ = 1064 nm; RL = 50 Ω	---	5	---	ns
	Uniformity of Response	V _R = 150 V; λ = 1064 nm; @ 23°C	---	2	5	%
	Cross talk	V _R = 150 V; λ = 1064 nm; @ 23°C	---	2	5	%

Disclaimer: Due to our policy of continued development, specifications are subject to change without notice.

USA:

Pacific Silicon Sensor, Inc.
5700 Corsa Avenue, #105
Westlake Village, CA 91362 USA
Phone (818) 706-3400
Fax (818) 889-7053
Email: sales@pacific-sensor.com
www.pacific-sensor.com

7/10/2009

International sales:

Silicon Sensor International AG
Wilhelmshofstrasse 76-77
D-12459 Berlin, Germany
Phone +49 (0)30-63 99 23 10
Fax +49 (0)30-63 99 23 33
Email: sales@silicon-sensor.de
www.silicon-sensor.de