

FEATURES

- \varnothing 3.57 mm active area
- Low dark current
- Long term stability
- High shunt resistance

DESCRIPTION

Two 10.0 mm² Low Dark Current PIN Photodiodes stacked vertically. The top photodiode has a full spectrum response while the bottom photodiode sees only Near InfraRed light. Hermetically packaged in a TO-5 with a clear borosilicate glass window cap.

APPLICATIONS


- Dual wavelength power meters
- Remote color temperature sensing




ABSOLUTE MAXIMUM RATING

SYMBOL	PARAMETER	MIN	MAX	UNITS
T _{STG}	Storage Temp	-55	+125	°C
T _{OP}	Operating Temp	-40	+100	°C
V _{R(OP)}	Reverse Operating Voltage	-	50	V
I _(PEAK)	Peak DC Current	-	10	mA

SCHEMATIC



SPECTRAL RESPONSE

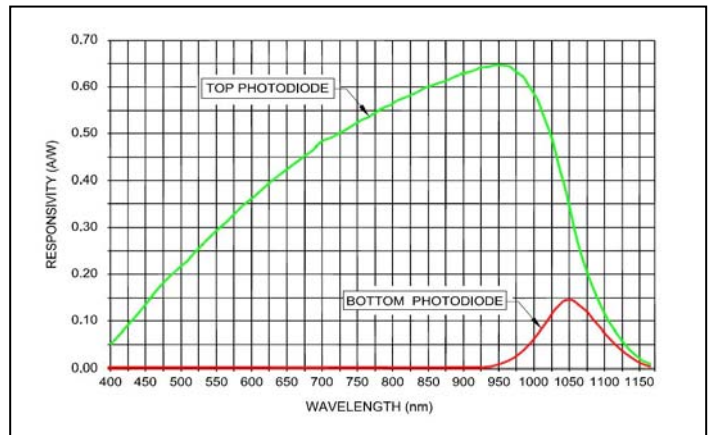

ELECTRO-OPTICAL CHARACTERISTICS @ 23° C

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	TYP	MAX	UNITS
R _{SH}	Shunt Resistance	V _R = ±10 mV	100	500	---	MΩ
I _D	Dark Current	V _R = 10 V	---	2	---	nA
C	Capacitance	V _R = 0 V;	---	350	---	pF
		V _R = 10 V;	110	150	---	
	Responsivity (Top)	V _R = 0 V; λ = 950 nm	---	0.65	---	A/W
	Responsivity (Bottom)	V _R = 0 V; λ = 1050 nm	---	0.15	---	
NEP	Noise Equivalent Power	V _R = 0 V; λ = 850 nm; R _L = 50 Ω	---	5.0 × 10 ⁻¹⁴	---	W/Hz ^{1/2}
V _{BR}	Breakdown Voltage	I _R = 10 μA	20	---	---	V
t _r	Rise Time	V _R = 10 V; λ = 1000 nm; R _L = 50 Ω	---	10	---	μs

Disclaimer: Due to our policy of continued development, specifications are subject to change without notice.

USA:

Pacific Silicon Sensor, Inc.
5700 Corsa Avenue, #105
Westlake Village, CA 91362 USA
Phone (818) 706-3400
Fax (818) 889-7053
Email: sales@pacific-sensor.com
www.pacific-sensor.com

11/9/2011



International sales:

First Sensor AG
Peter-Behrens-Str. 15
12459 Berlin, Germany
Phone +49 (0) 30 / 63 99 23 99
Fax +49 (0) 30 / 63 99 23 752
Email: sales.opto@first-sensor.de
<http://www.first-sensor.de>